


AIGI 26MSC

AIGI 26 with Multi-Silicone Rubber Cores

AIGI 26MSC adds resilient multi-silicone rubber cores to AIGI 26 packing. The elastic rubber core gives the packing better memory, allowing it to withstand radial shaft motion and vibration while maintaining excellent leakage control with minimal gland adjustment. As a low-friction, dense packing, AIGI 26WSC is used in pumps, mixers and agitators to stabilize extreme runout conditions.

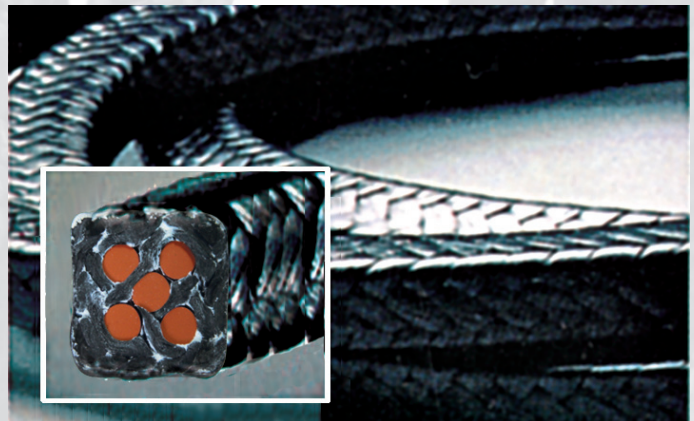

Property	Value
Color	Black
Temperature	260°C (500°F)
PH Range	2 ~ 12
Speed	10m/s (2000 Ft/min)
Pressure	40kgf/cm² (580 PSI)

** Lab results for individual production lots tested; some variability will occur.*

Application

General service packing for pumps, mixers and agitators where extreme radial runout exists



AIGI ENVIRONMENTAL INCORPORATED

www.aigienvironmental.com