


AIGI 26WSC

AIGI 26W with Single Silicone Rubber Core

AIGI 26WSC adds a resilient single silicone rubber core to AIGI 26W. The elastic rubber core gives the packing better memory, allowing it to withstand radial shaft motion and vibration while maintaining excellent leakage control with minimal gland adjustment. AIGI 26WSC is used widely in pump applications requiring additional stability because of shaft runout.

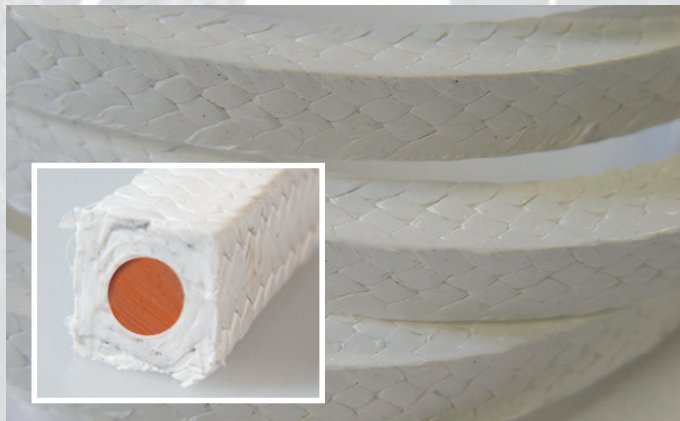

Property

Value

Color

White

Temperature

260°C (500°F)

PH Range

2 ~ 12

Speed

10m/s (2000 Ft/min)

Pressure

40kgf/cm² (580 PSI)

Reciprocating Pressure

100kgf/cm² (1450 PSI)

** Lab results for individual production lots tested; some variability will occur.*

Application

General service pump, mixer and agitator packing designed for shaft stabilization



AIGI ENVIRONMENTAL INCORPORATED

www.aigienviromental.com